

NORUS Series

SEWAGE PUMP

ShinMaywa
VISION WITH INSIGHT

The Norus Series is a smart choice for sewage applications where efficiency and long-term reliability go hand in hand. Its corrosion-resistant design, vibration-reducing bearings, and efficient performance help lower wear, reduce operating costs, and extend pump life.

OVERVIEW

- True continuous duty operation 24/7/365
- Lightweight design featuring air-filled class E insulated motors
- Corrosion-resistant construction using stainless steel and polyamide fiber-reinforced resin
- Cast aluminum bearing housing for enhanced strength and heat dissipation
- Vibration-reducing "anti-creep" bearing design improves stability and extends service life under low head operating conditions.
- Superior structural integrity compared to competing pumps
- High efficiency and reliable operation resulting in low lifetime ownership cost




**SCAN FOR
MORE INFO**

8510 S. Sandy Parkway, Sandy, UT 84070
877.213.3598
shinmaywasales.com


SPECIFICATIONS

- 2" NPT discharge
- Vortex impeller
- Impeller material: polyamide fiber reinforced resin
- Pump housing material: polyamide fiber reinforced resin
- Motor housing 304 stainless steel
- 1-1/4" solids handling
- Anti-vibration deep groove bearing technology
- Dual shaft seals: silicon carbide lower, carbon ceramic upper
- Air-filled class E insulated motor
- Built-in micro thermal protector
- 32' power cable (20' on 1/5 HP)
- Max temperature 104F
- ETL listed
- 2-year warranty

PERFORMANCE CURVE

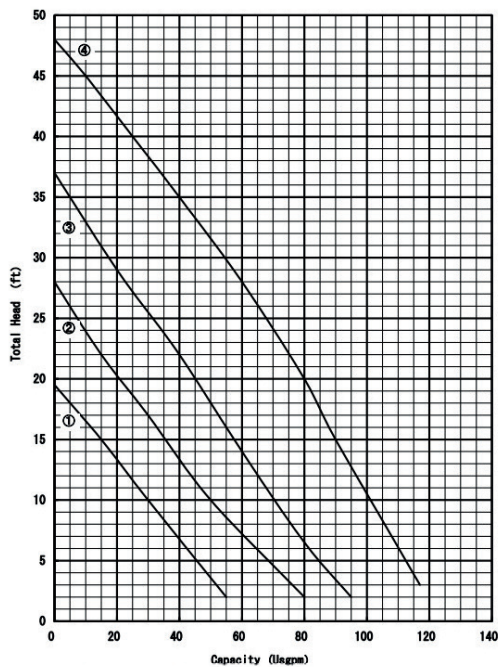

DIMENSIONS

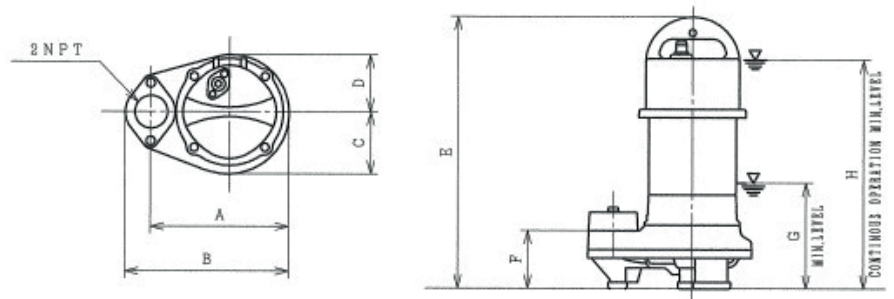

Curve	Model	HP	Voltage	Amps	Weight	A	B	C	D	E	F	G	H
1	5OCR215S	1/5	115	3	13.2 lbs	6.7	8.1	3	2.7	15	3.9	5.9	13
2	5OCR225S	1/3	115	4.4	15.4 lbs	8	9.5	3.6	3.3	15.5	3.9	5.9	13
3	5OCR24S	1/2	115	5	18.1 lbs	8	9.5	3.6	3.3	15.5	14.1	6	13.2
4	5OCR275S	1	115	10	18.7 lbs	8	9.5	3.6	3.3	15.5	14.1	6	13.2
4	5OCR275S-2	1	230	5	18.7 lbs	9	9.5	3.6	3.3	15.5	14.1	6	13.2



SCAN FOR
MORE INFO

8510 S. Sandy Parkway, Sandy, UT 84070
877.213.3598
shinmaywasales.com